


FIND THE RIGHT INNOVATION FOR THE MISSION.

Goodyear has proudly served the nation’s military for over 105 years with key tire fitments. Exclusive advances make Goodyear Defense Tires the mission-critical performance choice with innovations found nowhere else. Use the chart below to find the model right for you, whatever the payload or mission requirement — from line haul, local haul, unit resupply, combat, combat support, or combat service support missions.

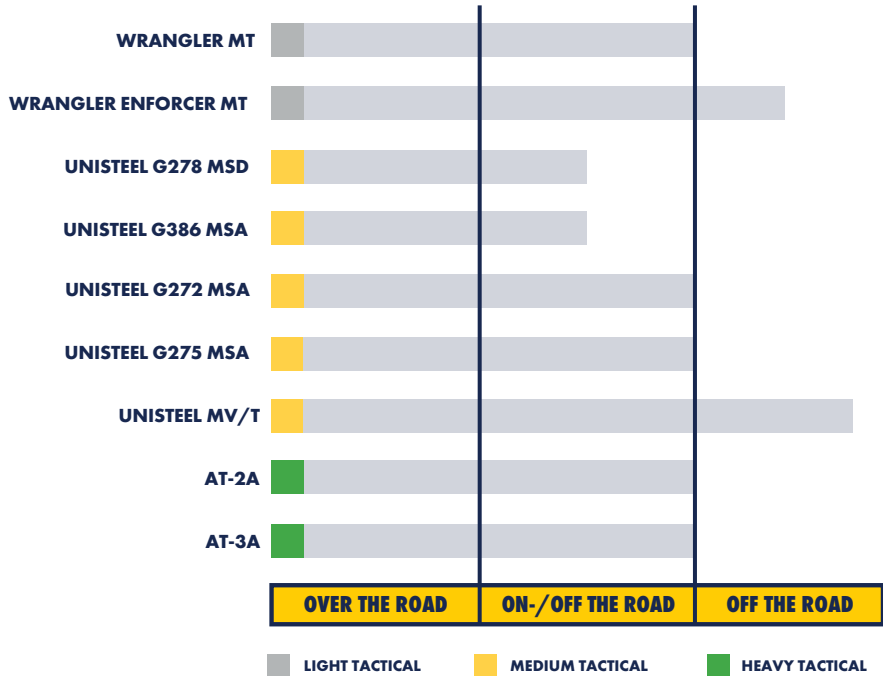

MILITARY TIRE SELECTOR

Size	Wrangler MT®	Wrangler Enforcer MT®	MV/T	AT-2A	AT-3A	G272 MSA	G275 MSA	G278 MSD	G386 MSS
37x12.50R16.5	D / 19	D / 19, E / 19							
12.00R20						J / 25			J / 22
14.00R20				J / 30					
16.00R20				M / 33	M / 33				
335/80R20							F / 20		
365/80R20							G / 20		
395/85R20			G / 26, L / 26						
385/65R22.5								J / 30	
445/65R22.5								L / 30	

G272, G275, MV/T, AT-2A, AT-3A are trademarks of The Goodyear Tire & Rubber Company. Wrangler and Unisteel are registered trademarks of the The Goodyear Tire & Rubber Company.

ASK ABOUT GOODYEAR MILITARY TIRES FOR ALL PAYLOAD AND MISSION REQUIREMENTS:

Sales:

BRIAN DOUGHERTY
Military Account Manager
brian_dougherty@goodyear.com
(330) 796-7202

O.E. Engineering:

DAN SHY
Senior Military Applications Engineer
daniel_shy@goodyear.com
(330) 283-3817

Sustainment Engineering:

TONY HOUSER
Customer Solutions Engineer
tony_houser@goodyear.com
(330) 515-1424



Additional sizes and designs available. For more information, please visit our website at gov.goodyear.com/military

© 2026 The Goodyear Tire & Rubber Company. All rights reserved. Printed in the U.S.A. 0101



2025-2026 DATA BOOK

MISSION READY

MISSION-CRITICAL PERFORMANCE FROM GOODYEAR

Goodyear military tires provide innovations no one else can — for mobilization advantages no one should do without.

PROTECTION | PAYLOAD | PERFORMANCE



Military Tire Sizes

Rim	Size	Tread	Load Range	Material No. / Goodyear Part No.	Overall Diameter	Overall Width	Weight	Static Loaded Radius	Revs	Tread Depth	Recommended Measuring and Optional Rims	Running Condition		Max Load & Pressure		Max Speed		Footprint Area	
														English	Metric	English	Metric	English	Metric
		LI Single/Dual/Speed	(Ply Rating)		(in & mm)	(in & mm)	(lbs & kg)	(in & mm)	(Per Mile / Per km)	(32nds & mm)	(in)	Single or Dual Mount		(lb @ psi)	(kg @ kPa)	(mph)	(kph)	(in²)	(cm²)
16.5"	37x12.50R16.5	Wrangler MT*	D (8 ply)	184251 743-123-154	36.6 in	12.4 in	83 lbs	16.7 in	568	19/32nds	Measuring 8.25 Optional 9.75	Highway	S	3,850 @ 50	1,745 @ 350	87	140	97	625
		127 / NA / N			930 mm	315 mm	38 kg	424 mm	353	15 mm		Highway	D	—	—	—	—	—	—
												Cross Country	S	3,850 @ 38	1,745 @ 260	40	65	107	690
	37x12.50R16.5	Wrangler Enforcer MT*	D (8 ply)	240997 779-026-859	36.6 in	12.4 in	82 lbs	16.7 in	568	19/32nds	Measuring 8.25 Optional 9.75	Mud and Sand	S	3,850 @ 32	1,745 @ 220	12	20	118	760
												Highway	S	3,850 @ 50	1,745 @ 350	87	140	89	575
		127 / NA / N			930 mm	315 mm	37 kg	424 mm	353	15 mm		Highway	D	—	—	—	—	—	—
	37x12.50R16.5	Wrangler Enforcer MT*	E (10 ply)	240996 779-025-859	36.6 in	12.4 in	82 lbs	16.7 in	568	19/32nds	Measuring 8.25 Optional 9.75	Cross Country	S	3,850 @ 38	1,745 @ 260	40	65	98	635
												Mud and Sand	S	3,850 @ 32	1,745 @ 220	12	20	108	699
		133 / NA / N			930 mm	315 mm	37 kg	424 mm	353	15 mm		Highway	S	4,540 @ 65**	2,060 @ 450	87	140	77	497
												Highway	D	—	—	—	—	—	—
												Cross Country	S	4,540 @ 45	2,060 @ 310	40	65	99	637
												Mud and Sand	S	4,540 @ 38	2,060 @ 260	12	20	109	702
20"	12.00R20	G386 MSS	J (18 ply)	215460 138-389-562	44.0 in	11.7 in	161 lbs	20.2 in	472	22/32nds	Measuring 8.50 Optional 8.00, 9.00	Highway	S	8,270 @ 120	3,750 @ 830	62	120	98	632
		154 / 151 / K			1118 mm	315 mm	37 kg	424 mm	353	15 mm		Highway	D	7,610 @ 120	3,450 @ 830	62	120	87	561
	14.00R20	AT-2A	J (18 ply)	6083 152-705-961	49.2 in	15.2 in	263 lbs	20.2 in	427	30/32nds	Measuring 10.00	Cross Country	S	8,270 @ 60	3,750 @ 410	40	65	128	826
												Mud and Sand	S	8,270 @ 50	3,750 @ 350	12	20	140	903
		160 / NA / G			1250 mm	386 mm	119 kg	569 mm	265	24 mm		Highway	S	9,960 @ 100	4,525 @ 690	55	88	142	916
	16.00R20	AT-2A	M (22 ply)	6258 155-022-987	52.1 in	17.1 in	332 lbs	23.7 in	403	33/32nds	Measuring 10.00 Optional 11.25,13.00/2.5	Highway	D	—	—	—	—	—	—
		173 / NA / G			1323 mm	434 mm	151 kg	602 mm	250	26 mm		Cross Country	S	9,960 @ 45	4,525 @ 310	40	65	208	1342
	16.00R20 ⁽¹⁾	AT-3A	M (22 ply)	136437 155-022-003	51.6 in	17.4 in	352 lbs	22.8 in	407	33/32nds	Measuring 10.00 Optional 11.25,13.00/2.5	Mud and Sand	S	9,960 @ 30	4,525 @ 200	12	20	255	1645
												Highway	S	14,540 @ 110	6,600 @ 750	55	88	195	1258
		173 / NA / G			1311 mm	442 mm	160 kg	579 mm	253	26 mm		Highway	D	—	—	—	—	—	—
	335/80R20	G275 MSA	F (12 ply)	215854 756-122-288	41.4 in	13.1 in	133 lbs	19.1 in	499	20/32nds	Measuring 9.00 Optional 8.00,10.00, 11.00	Cross Country	S	14,540 @ 70	6,600 @ 480	40	65	238	1535
		145 / NA / M			1050 mm	333 mm	60 kg	485 mm	310	16 mm		Mud and Sand	S	14,540 @ 50	6,600 @ 350	12	20	275	1774
	365/80R20 ⁽¹⁾	G275 MSA	G (14 ply)	244129 756-033-288	43.0 in	14.4 in	162 lbs	19.8 in	483	20/32nds	Measuring 11.00 Optional 10.00	Highway	S	14,540 @ 110	6,600 @ 750	55	88	198	1277
												Highway	D	—	—	—	—	—	—
		154 / NA / K			1092 mm	365 mm	73 kg	503 mm	300	16 mm		Cross Country	S	14,540 @ 70	6,600 @ 480	40	65	243	1568
	365/80R20MPT ⁽¹⁾	ARMOR MAXLTIV	L (20 ply)	234264 756-003-999	43.3 in	14.7 in	160 lbs	20.0 in	483	25/32nds	Measuring 11 Optional 11SDC	Mud and Sand	S	14,540 @ 50	6,600 @ 350	12	20	280	1806
		152 / NA / K			1099 mm	372 mm	69 kg	509 mm	300	19.8 mm		Highway	S	6,395 @ 80	2,900 @ 550	81	130	106	684
	395/85R20 ⁽¹⁾	MV/T	G (14 ply)	241093 159-002-710	46.6 in	15.4 in	206 lbs	21.5 in	446	26/32nds	Measuring 10.00 Optional 11.00	Highway	D	—	—	—	—	—	—
		161 / NA / K			1184 mm	391 mm	98 kg	546 mm	277	21 mm		Cross Country	S	8,270 @ 95	3,750 @ 660	68	110	117	755
												Highway	D	—	—	—	—	—	—
	395/85R20 ⁽¹⁾	MV/T	L (20 ply)	6344 159-902-710	46.6 in	15.4 in	216 lbs	21.5 in	446	26/32nds	Measuring 10.00 Optional 11.00	Cross Country	S	8,270 @ 35	3,750 @ 240	40	65	143	923
												Mud and Sand	S	8,270 @ 32	3,750 @ 240	12	20	173	1116
		168 / NA / K			1184 mm	391 mm	98 kg	546 mm	277	21 mm		Highway	S	7,830 @ 90	3,550 @ 620	68	110	107	688
22.5"	385/65R22.5	G278 MSD	J (18 ply)	218206 756-513-422	43.0 in	14.8 in	182 lbs	19.9 in	485	30/32nds	Measuring 11.75 Optional 12.25	Highway	S	10,200 @ 100	4,625 @ 700	68	110	155	1000
		158 / NA / K			1092 mm	376 mm	83 kg	505 mm	301	24 mm		Highway	D	—	—	—	—	—	—
												Cross Country	S	10,200 @ 55	4,625 @ 380	40	65	174	1123
	445/65R22.5	G278 MSD	M (22 ply)	277017 756-056-897	46.0 in	18.0 in	201 lbs	21.1 in	453	23/32nds	Measuring 13.00 Optional 12.25, 14.00	Mud and Sand	S	10,200 @ 40	4,625 @ 280	12	20	220	1419
		169 / NA / K			1168 mm	457 mm	101 kg	536 mm	281	18 mm		Highway	S	12,300 @ 123	5,600 @ 850	68	110	144	929
												Highway	D	—	—	—	—	—	—
	445/65R22.5 ⁽¹⁾	ARMOR MAX PRO GRADE MSD	M (22 ply)	276796 756-012-044	46.3 in	17.6 in	226 lbs	21.3 in	450	30/32nds	Measuring 11.00 Optional 10.00	Cross Country	S	12,300 @ 70	5,600 @ 480	40	65	179	1155
												Mud and Sand	S	12,300 @ 50	5,600 @ 350	12	20	212	1368
		169 / NA / K			1179 mm	447 mm	103 kg	549 mm	282	24 mm		Highway	S	12,800 @ 130	5,800 @ 900	68	110	148	955
WRANGLER MT												Highway	D	—	—	—	—	—	—
												Cross Country	S	12,800 @ 115	5,800 @ 790	40	65	185	1194
												Mud and Sand	S	12,800 @ 65	5,800 @ 450	12	20	219	1413
WRANGLER ENFORCER MT																			
WRANGLER G272 MSA																			
WRANGLER G278 MSA																			
WRANGLER G386 MSA																			

⁽¹⁾ ECE POR Certified
*Do not mix Wrangler MT and Wrangler Enforcer MT
**Must use 65 psi approved wheel

